DOWNLINK

Avon Pro Multipack

Avon Pro Fire Rated Downlight - White 8 Pack

Product code **430850-MP**

Power	**4W / 6W**
Luminous flux	**550 / 800 lm**
Efficacy	**135 lm/W**
Colour temperature	**2700K / 3000K / 4000K / 6000K**
Beam angle	**60°**
Protection	**65/20 · IK06**
Lifetime L70	**50,000 h**
Warranty	**5 years**



Introduction

Wattage and colour selectable, IP65, up to 135 lm/W.

Features

- Wattage selectable: 4W/6W
- 4CCT selectable: 2700K, 3000K, 4000K, 6000K
- Complies with parts B, C, E and L of Building Regulations
- Suitable for solid or stranded cable Ø 0.75 – 2.5mm2
- Fully tested for 30, 60 and 90 minutes fire rated
- Meets STA Pattern Book fire test requirements
- 5 Year Product Warranty

Certification and options

4CCT Colour selectable · Wattage selectable · UKCA marked · CE marked

Recommended applications

Offices, corridors, retail, hospitality





electrical wholesaler ew awards 2024

Fire Rated	30 min	60 min	90 min
Solid Joist	•	•	•
Web joist	•	•	
I Joist	•	•	

Specification

Optical

Luminous flux	**550 / 800 lm**
Efficacy	**135 lm/W**
Colour temperature	**2700K / 3000K / 4000K / 6000K**
Colour selection	**4CCT**
Colour rendering	**Ra 85**
Beam angle	**60°**

Electrical

Power	**4W / 6W**
Supply voltage	**220-240V AC**
Frequency	**50 Hz / 60 Hz**
Driver type	**CC**
Driver	**Lumineux**
Dimming	**Triac**

Lifetime and warranty

Lifetime L70	**50,000 h**
Energy class	**D**
Warranty	**5 years**
Replaceable driver	**Professional**
Replaceable light source	**No**

Construction


Ingress protection	**65/20**
Impact resistance	**IK06**
Electrical class	**Class II**
Body	**Aluminium**
Diffuser	**Polycarbonate**
Colour (RAL)	**RAL 9016**
Location	**Internal**
Cut-out (mm)	**68-75**
Dimensions (L x W x H)	**85 x 85 x 48 mm**


Installation

Mounting	**BESA/Conduit**
Connection	**Lever Terminal**
Ambient temperature	**-10 to +45 °C**

Values are nominal. Luminous flux and efficacy are for the complete luminaire. Specifications may change without notice; the product page always carries the latest version.

Dimensions

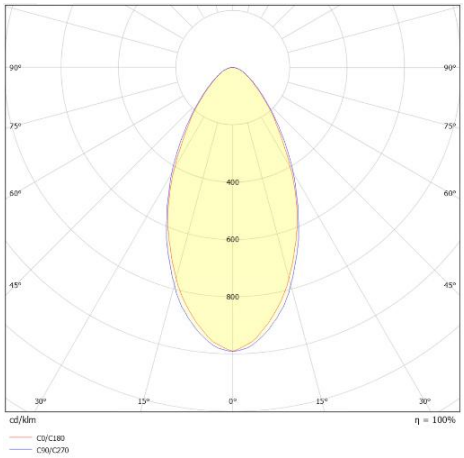

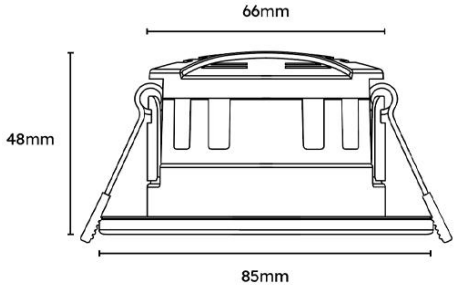

Ordering information · Avon Pro

CODE	DESCRIPTION	POWER	LUMINOUS FLUX	EFFICACY	CCT	BEAM
430850	Avon Pro Fire Rated Downlight - White	4W / 6W	550 / 800	135 lm/W	2700K / 3000K / 4000K / 6000K	60°
430850-MP	**Avon Pro Fire Rated Downlight - White 8 Pack**	**4W / 6W**	**550 / 800**	**135 lm/W**	**2700K / 3000K / 4000K / 6000K**	**60°**

Compatible modules and accessories

	CODE	DESCRIPTION
	430852	Avon Pro Black Bezel
	430851	Avon Pro Brass Bezel
	430854	Avon Pro Brushed Chrome Bezel
	430853	Avon Pro Chrome Bezel
	430885-WH	Avon Pro Extender Ring White
	430967	Grafham 2.5W E-SEL3 Avon Emergency Conversion Pack 50-340V DC 10-250mA LifePO4 3.2V DC 3.2Ah

DOWNLOADS

Photometric files (LDT), installation instructions and the latest datasheet are on the product page:

www.lumineux.co.uk/shop/430850-mp-avon-pro-fire-rated-downlight-4w-6w-4cct-ip65-white-ral-9016-60d-8-pack-54901

WARRANTY AND SUPPORT

5 years warranty. Terms at www.lumineux.co.uk/product-warranty-on-site-warranty.

Free lighting design and technical support: 01507 328031, support@lumineux.co.uk