PENDANT

Blakeley

Blakeley Retail Pendant - White

Product code **430684**

Power	**30W**
Luminous flux	**4,200 lm**
Efficacy	**140 lm/W**
Colour temperature	**4000K**
Beam angle	**100°**
Protection	**IP42 · IK08**
Lifetime L70	**50,000 h**
Warranty	**5 years**



Introduction

4000K, IP42, up to 140 lm/W.

Features

- Compact modern cylindrical mounted design
- Easy installation
- Low glare polycarbonate reflector

Certification and options

UKCA marked

CE marked

Recommended applications

Retail, hospitality, open-plan offices



Specification

Optical

Luminous flux	**4,200 lm**
Efficacy	**140 lm/W**
Colour temperature	**4000K**
Colour rendering	**Ra 80**
Beam angle	**100°**

Electrical

Power	**30W**
Supply voltage	**220-240V AC**
Frequency	**50 Hz / 60 Hz**
Driver type	**CC**
Driver	**Sosen**

Lifetime and warranty

Lifetime L70	**50,000 h**
Energy class	**D**
Warranty	**5 years**
Replaceable driver	**Professional**
Replaceable light source	**Professional**

Construction

Ingress protection	**IP42**
Impact resistance	**IK08**
Electrical class	**Class I**
Body	**Aluminium**
Diffuser	**Polycarbonate**
Colour (RAL)	**RAL 9016**
Location	**Internal**
Dimensions (L x W x H)	**278 x 278 x 276 mm**

Installation

Mounting	**BESA/Conduit**
Connection	**Flying Lead**
Ambient temperature	**-30 to +40 °C**

Values are nominal. Luminous flux and efficacy are for the complete luminaire. Specifications may change without notice; the product page always carries the latest version.

Dimensions

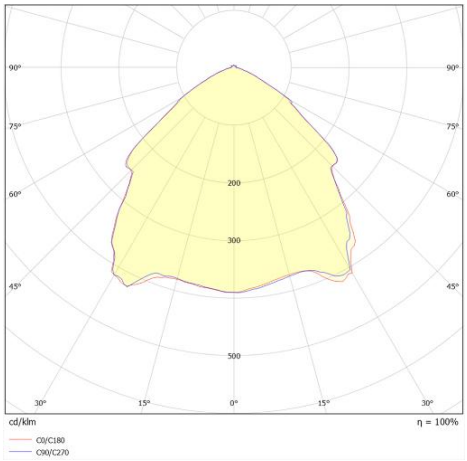

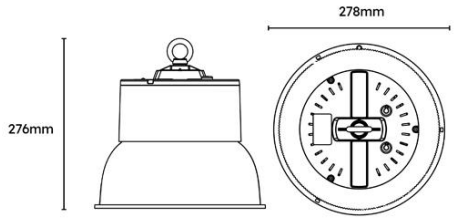

DOWNLOADS

Photometric files (LDT), installation instructions and the latest datasheet are on the product page:

www.lumineux.co.uk/shop/430684-blakeley-retail-pendant-30w-4000k-white-55861

WARRANTY AND SUPPORT

5 years warranty. Terms at www.lumineux.co.uk/product-warranty-on-site-warranty.

Free lighting design and technical support: 01507 328031, support@lumineux.co.uk