ARIEL

Lumiwave Ariel Gateway

Lumiwave Ariel Gateway

Product code **470085**

Protection	**IP30**



Features

- Line of sight up to 15km and can cover about 2km in an urbanised environment
- Quad-core industrial processor with big memory
- Durable metal enclosure for industrial applications
- Desktop or wall mounting
- Multi backhaul connectivity backubs with Ethernet

Certification and options

UKCA marked

Emergency lighting

CE marked







Specification

Electrical

Frequency	**50 Hz / 60 Hz**

Construction

Ingress protection	**IP30**

Installation


Ambient temperature	**-20 to +60 °C**

Other

Channel	**8 (Half-duplex)**
CPU	**Quad-core 1.3 GHz, 64-bit ARM cortex-A35**
Storage	**1 x Micro SD Slot (Internal)**
Flash memory	**8 GB eMMC**
Frequency band	**CN470/IN865/EU868**
Memory	**512 MB DDR3 RAM**

Values are nominal. Specifications may change without notice; the product page always carries the latest version.

Dimensions

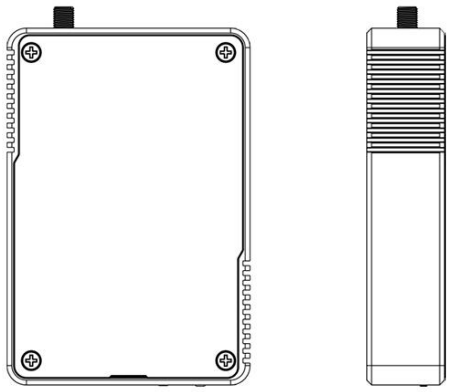

DOWNLOADS

Photometric files (LDT), installation instructions and the latest datasheet are on the product page:

www.lumineux.co.uk/shop/470085-lumiwave-ariel-gateway-63149

WARRANTY AND SUPPORT

Terms at www.lumineux.co.uk/product-warranty-on-site-warranty.

Free lighting design and technical support: 01507 328031, support@lumineux.co.uk