DOWNLIGHT

Eyebrook Surface

Eyebrook Surface Downlight - 4" White 60D

Product code **430228-WH**



Power	**25W**
Luminous flux	**2,750 lm**
Efficacy	**110 lm/W**
Colour temperature	**4000K**
Beam angle	**60°**
Protection	**IP54 · IK08**
Lifetime L70	**50,000 h**
Warranty	**5 years**

Introduction

4000K, IP54, up to 110 lm/W.

Features

- Low glare lens design
- Compact modern cylindrical mounted design
- Easy installation
- Integrated LED driver
- 5 Year Product Warranty

Certification and options

IP54 Ingress protection · UKCA marked · CE marked

Recommended applications

Offices, corridors, retail, hospitality

Specification

Optical

Luminous flux	**2,750 lm**
Efficacy	**110 lm/W**
Colour temperature	**4000K**
Colour rendering	**Ra 80**
Beam angle	**60°**

Electrical

Power	**25W**
Supply voltage	**220-240V AC**
Frequency	**50 Hz / 60 Hz**
Driver type	**CC**
Driver	**Lumineux**

Lifetime and warranty

Lifetime L70	**50,000 h**
Energy class	**E**
Warranty	**5 years**
Replaceable driver	**Professional**
Replaceable light source	**Professional**

Construction

Ingress protection	**IP54**
Impact resistance	**IK08**
Electrical class	**Class I**
Body	**Aluminium**
Diffuser	**Polycarbonate**
Colour (RAL)	**RAL 9016**
Location	**Internal**
Dimensions (L x W x H)	**120 x 120 x 144 mm**

Installation

Mounting	**BESA/Conduit**
Connection	**Push Terminal**
Ambient temperature	**-20 to +45 °C**

Values are nominal. Luminous flux and efficacy are for the complete luminaire. Specifications may change without notice; the product page always carries the latest version.

Dimensions

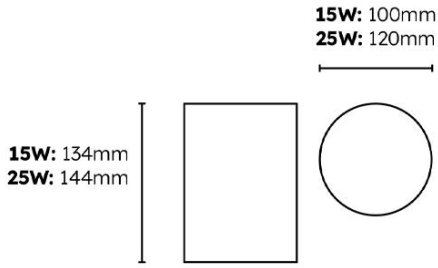

Ordering information · Eyebrook Surface

CODE	DESCRIPTION	POWER	LUMINOUS FLUX	EFFICACY	CCT	BEAM
430227-BL	Eyebrook Surface Downlight - 4" Black 60D	15W	1,650	110 lm/W	4000K	60°
430227-WH	Eyebrook Surface Downlight - 4" White 60D	15W	1,650	110 lm/W	4000K	60°
430228-BL	Eyebrook Surface Downlight - 4" Black 60D	25W	2,750	110 lm/W	4000K	60°
430228-WH	**Eyebrook Surface Downlight - 4" White 60D**	**25W**	**2,750**	**110 lm/W**	**4000K**	**60°**

Code suffixes: -BL Black finish -WH White finish

DOWNLOADS

Photometric files (LDT), installation instructions and the latest datasheet are on the product page:

www.lumineux.co.uk/shop/430228-wh-eyebrook-surface-downlight-4-25w-4000k-ip54-white-semi-specular-60d-56089

WARRANTY AND SUPPORT

5 years warranty. Terms at www.lumineux.co.uk/product-warranty-on-site-warranty.

Free lighting design and technical support: 01507 328031, support@lumineux.co.uk