FLOODLIGHT

Harlock

Harlock Court FloodLight - Grey Asymmetric

Product code **431262**

Power	**600W / 700W / 800W**
Luminous flux	**90,000 / 105,000 / 120,000 lm**
Efficacy	**150 lm/W**
Colour temperature	**4000K**
Beam angle	**P60°**
Protection	**IP66 · IK08**
Lifetime L70	**100,000 h**
Warranty	**5 years**



Introduction

Wattage selectable, IP66, up to 150 lm/W.

Features

- 10kVA L/N-PE surge protection
- Tough IP66 & IK08 rated construction

Certification and options

IP66 Ingress protection · IK08 Impact rating · UKCA marked · CE marked

Recommended applications

Yards, car parks, loading areas, building facades






Specification

Optical

Luminous flux	**90,000 / 105,000 / 120,000 lm**
Efficacy	**150 lm/W**
Colour temperature	**4000K**
Colour rendering	**Ra 70**
Beam angle	**P60°**
Distribution	**Asymmetric**
Glare (UGR)	**<24**

Electrical

Power	**600W / 700W / 800W**
Supply voltage	**200-400V AC**
Frequency	**50 Hz / 60 Hz**
Driver type	**CC**
Driver	**Powerland**
Dimming	**0-10V**

Lifetime and warranty

Lifetime L70	**100,000 h**
Energy class	**B**
Warranty	**5 years**
Replaceable driver	**Professional**
Replaceable light source	**Professional**

Construction


Ingress protection	**IP66**
Impact resistance	**IK08**
Electrical class	**Class I**
Body	**Aluminium**
Diffuser	**Polycarbonate & Glass**
Colour (RAL)	**RAL 9006**
Location	**External**
Dimensions (L x W x H)	**875 x 695 x 150 mm**


Installation

Connection	**1.5m H05RN-F**
Ambient temperature	**-30 to +50 °C**

Values are nominal. Luminous flux and efficacy are for the complete luminaire. Specifications may change without notice; the product page always carries the latest version.

Dimensions

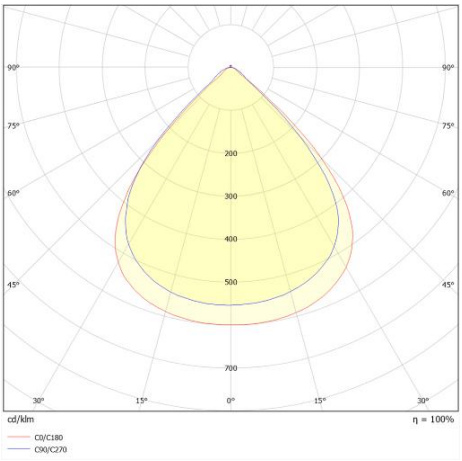

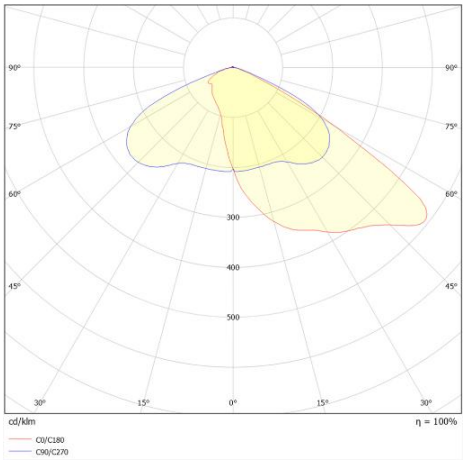

Ordering information · Harlock

CODE	DESCRIPTION	POWER	LUMINOUS FLUX	EFFICACY	CCT	BEAM
431256	Harlock Court Floodlight - Grey Asymmetric	200W / 300W / 400W	30,000 / 45,000 / 60,000	150 lm/W	4000K	P60°
431259	Harlock Court Floodlight - Grey Asymmetric	400W / 500W / 600W	60,000 / 75,000 / 90,000	150 lm/W	4000K	P60°
431262	**Harlock Court FloodLight - Grey Asymmetric**	**600W / 700W / 800W**	**90,000 / 105,000 / 120,000**	**150 lm/W**	**4000K**	**P60°**

Compatible modules and accessories

	CODE	DESCRIPTION
	431269	Harlock Court Floodlight 600W/700W/800W Anti Glare Shield

DOWNLOADS

Photometric files (LDT), installation instructions and the latest datasheet are on the product page:

www.lumineux.co.uk/shop/431262-harlock-court-floodlight-600w-700w-800w-4000k-grey-asymmetric-optic-56688

WARRANTY AND SUPPORT

5 years warranty. Terms at www.lumineux.co.uk/product-warranty-on-site-warranty.

Free lighting design and technical support: 01507 328031, support@lumineux.co.uk